


# RP 系列 SERIES


- 3000h at 105°C
- high-reliability and professional applications
- RoHS Compliant

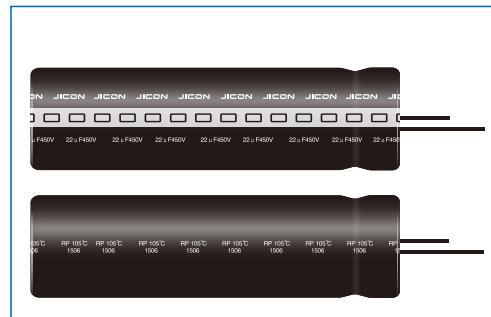

## ◆ SPECIFICATION

Items	Characteristics										
Operating Temperature Range(°C)	-25~+105°C										
Voltage range (V)	200~450v										
Capacitance Range ( $\mu$ F)	18~560 $\mu$ F										
Capacitance Tolerance	$\pm 20\%$ (at 20°C, 120Hz)										
leakage current ( $\mu$ A)	After 5 minute at 20°C application of rated voltage , leakage current is not more than: $I \leq 0.02CV + 25 \mu A$ C:Nominal Capacitance ( $\mu$ F) V:Rated Voltage (V)										
Dissipation Factor(Tan $\delta$ )	WV(V)	200	250	400	420	450					
	Tan $\delta$ (max)	0.15	0.15	0.2	0.20	0.20					
	(at 20°C, 120Hz)										
LowTemperature Characteristics	Rated Voltage (V)	200~250		400~450							
	Z-25°C/Z+20°C	3		8							
	(at 120Hz)										
Load Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DCvoltage with the rated rippled current is applied for 3000 hours at 105 °C										
	Capacitance change	Within $\pm 20\%$ initial value									
	D. F. (Tan $\delta$ )	Not more than 200% of specified value									
	leakage current	Not more than specified value									
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000hours at 105°Cwithout voltage applied .Before the measurement , the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.										
	Capacitance change	Within $\pm 20\%$ initial value									
	D. F. (Tan $\delta$ )	Not more than 200% of specified value									
	leakage current	Not more than 200% of specified value									

## ◆ DIMENSIONS(mm)

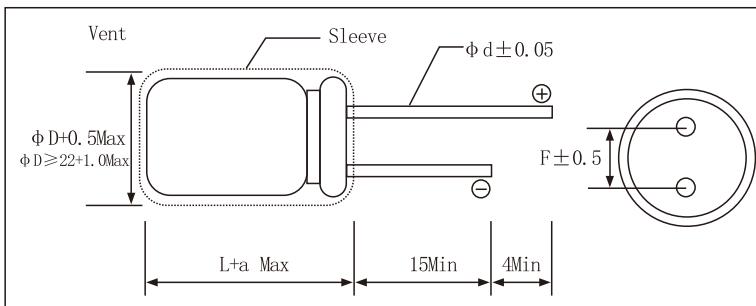

Φ D	10	13	16~18
F	5	5	7.5
Φ d	0.6	0.6	0.8
a	2	2	2

## ◆ Frequency Coefficient

Frequency	50Hz 60Hz	120Hz	1kHz	10kHz	100kHz
Coefficient	200~250V	0.8	1.0	1.20	1.30
	400~450V	0.8	1.0	1.25	1.40
				1.50	

## ◆ Temperature Coefficient

Temperature (°C)	+70	+85	+105
Coefficient	1.80	1.40	1.00

# RP 系列

SERIES

## ◆ STANDARD RATINGS

UR (Surge Voltage) Code	Rated Capacitance ( $\mu$ F)	Max Impedance 20°C120Hz ( $\Omega$ )	Rated Ripple Current 105°C120Hz (mA rms)	Size $\phi D \times L$ (mm)
(V)				
200 (250) 2D	82	2.42	400	10×30
	100	1.99	460	10×36
	120	1.66	530	10×40
	150	1.33	620	13×30
	180	1.11	700	13×36
	220	0.90	800	13×42
	270	0.74	870	16×36
	330	0.60	1010	16×40
	390	0.51	1130	18×32
	470	0.42	1270	18×40
250 (300) 2E	560	0.36	1390	18×45
	68	2.93	330	10×33
	82	2.43	420	10×40
	100	1.99	480	10×51
	120	1.66	560	13×36
	150	1.33	650	13×42
400 (450) 2G	220	0.91	840	16×40
	27	9.83	240	10×30
	33	8.04	280	10×36
	39	6.80	320	10×40
	47	5.65	370	13×30
	56	4.74	420	13×36
	68	3.90	480	13×40
	82	3.24	520	13×51
	100	2.65	580	16×36
		2.65	580	13×51
	120	2.21	670	16×40
		2.21	670	18×36
	150	1.77	770	18×40
	180	1.47	880	18×45
420 (470) W6	22	12.06	200	10×30
	27	9.83	230	10×36
	33	8.04	270	10×40
	39	6.81	310	13×30
	47	5.65	360	13×36
	56	4.74	430	13×40
		4.74	430	16×31
	68	3.90	490	16×36
		3.90	490	16×32
	82	3.24	550	13×42
		3.24	550	16×40
	100	2.65	610	16×40
		2.65	610	18×32
	120	2.21	660	18×36
	150	1.77	710	18×45
450 (500) 2W	18	14.74	180	10×30
	22	12.06	210	10×36
	27	9.83	250	10×40
	33	8.04	280	13×30
	39	6.81	320	13×36
		6.81	320	10×51
	47	5.65	380	13×40
		5.65	380	16×31
	53	5.01	410	10×51
	56	4.74	440	16×36
		4.74	440	16×32
	68	3.90	510	16×40
		3.90	510	16×36
	82	3.24	570	13×51
		3.24	570	16×40
		3.24	570	18×32
		3.24	570	13×51